




NUOVO SERIES 2015 2-WIRE INDOOR MONITOR

2-wire system indoor monitor,
audio phone.

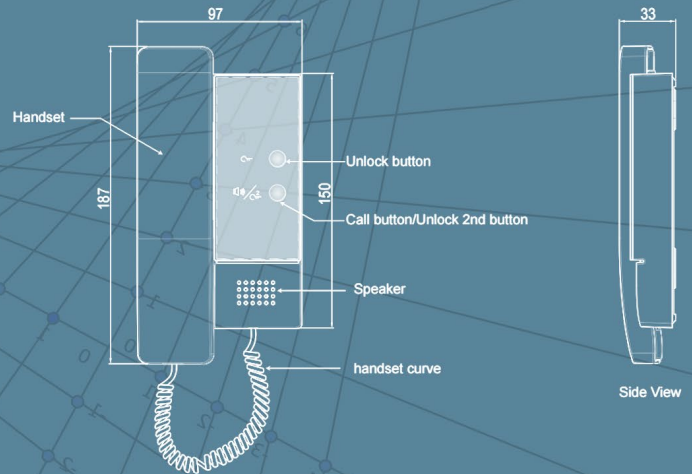

FEATURES

Handset audio phone;
DIP address setting;
Max.128 DIP address;
Inner call Intercom;
Door bell connection;
Two locks control;
4 ringtones choose;
Suitable for villa&apartment system.




TERMINAL DESCRIPTION

SW+,SW-:Door bell call button
connection port.
L1,L2:Bus terminal.
K4:Used to Ring Tone setting.
K3:Used to Ring Volume setting.
DIP1(Bit1~6):Used to User Code setting.
DIP2(Bit1~3):Used to Slave Monitor
Address
or Extended Address setting.



MOUNTING

- 1). Fix 2 screws to the wall at a appropriate height;
- 2). Connect the system correctly;
- 3). Attach the audio phone to the bracket.



SPECIFICATION

Power supply: DC24V;
Camera Lens: 1/4 ACS 4T image
sensor with DSP processor;
Power consumption: Standby
160W;Working status 450W;
Screen: 3.5 inch TFT ;
Resolution: 320(R, G, B)X240 pixels;
Video signal: CCIR/EIA Optional;
Wiring: 2 wires (non-polarity);
Dimension:
350(H)×128(W)×46(D)mm

Key functions

Handset	Pick up to communicate with visitor.
Handset curve	Connect handset with monitor.
Unlock button	Press to release the door.
Call button/Unlock 2nd button	In standby mode, pick up handset, then press Call button to activate the inner call; During calling/talking state, press Unlock 2nd button to release the second door.
Speaker	Send out voice from the visitor.



PACKING INFORMATION

Dimensions:
202(H)×100(W)×60(D)mm
Gross Weight: 0.4Kg

Carton: 415 (H)×360 (W)×265 (D)mm
Quantity: 28PCS