

Universal Hybrid DVR UH-0813L


PHILTEC




Features

- Camera Input : CIF/D1/960H/720P/1080P Supports
- H.264 High Profile Video Compression records.
- 1080p 120 FPS Recording
- HDMI Output & Simultaneous VGA Output and Real Time Live View
- PENTA PLEX
- Individual channel operation
- Remote access via PC, MAC®
- Free iPhone® App & Android App
- Free DDNS Server
- Remote Configuration & Firmware Upgrade
- Quick Setup
- Network Dual-Stream(up to 1920x1080)
- Network Hardware Supports 10/100 Mbps
- E-Mail event Notification along with AVI File Attachment.
- Synchronized audio for court evidence
- Time Stamp over backup data for court evidence
- HDD S.M.A.R.T status check and alert via e-mail or internal beep
- Multi OSD Languages
- Virtual PTZ Operation via RS-485
- 3TB HDD Support

Dimension

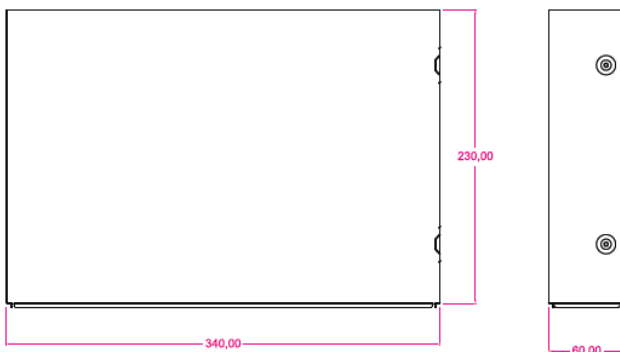

Real Panel Installation



Specification

MODEL		UH-0813L	
Video	Input	Number of Channels	8
		Camera	HD-SDI (720p25/30/50/60, 1080p25/30, 1080i50/60) or NTSC/PAL
	Output	Main Monitor	HDMI and VGA (1920x1080)
Sub Monitor		CVBS or SPOT	
Audio	Input / Output (HDMI support)		4 / 1
	Audio Codec		G.711
Alarm	Sensor Input		4
	Alarm Output		1
Serial	RS-485		1
Recording	Compression		H.264 (High Profile)
	1080p Input	1920x1080	15fps/ch
		1920x540	15fps/ch
		1280x720	15fps/ch
		640x360	15fps/ch
	720p Input	1280x720	25/30fps/ch
		640x360	25/30fps/ch
	Analog Input	960H	25/30fps/ch
		D1	25/30fps/ch
		CIF	25/30fps/ch
Recording Quality Grade		5 Levels	
Recording Mode		Continuous / Motion / Sensor / Schedule / Manual	
Pre Recording		Max. 20 Minutes	
Post Recording		Max. 60 Seconds	
Playback	Search		Date/Time, Event, Archive, Log
	Multi-Decoding		1, 4, 8
	Playback Speed		x0.25, x0.5, x2, x4, x8, x16, x32
Backup	Media		USB drive, External HDD, Network
	Format		BMP, AVI, Proprietary Format
	Huge Backup		Yes (Max. 24 hours)
Storage	HDD	Capacity of 1 HDD	4TB
		Internal HDDs	2
		e-SATA	-
	USB	Front	1
Rear		1	
User I/F	Input Method		IR, Mouse, Keyboard Controller
Network	Interface		10/100 Base-T
	Dynamic DNS		Yes (Free DDNS)
	Dual Encoding for Network		Yes
Features	Digital Zoom		Yes
	DLS (Day Light Saving)		Yes
	NTP (Network Time Protocol)		Yes
	S.M.A.R.T		Yes
	Internal Beep		Yes
	Multi-Language		Yes
e-mail Notification		Yes	
Network Access	Mobile		iPad / iPhone / Android
	Web Viewer		Windows (IE, Chrome, Firefox, Safari)
	PC Client		Single / Multi Client and CMS (64 channels)
	Remote Setup and Upgrade		Yes
Power	Power Supply Voltage		DC 12V 5A
Temperature	Operation		5°C ~40°C
	Storage		-10°C ~50°C
Humidity	Operation		20% ~80% (Non-condensing)
Weight	Unit Weight (Gross weight)		
Dimension	Unit Dimension (W x H x D)		340mm x 262mm x 63mm