

NUOVO SERIES 2015 2-WIRE INDOOR MONITOR

2-wire system indoor monitor,
audio phone.



SPECIFICATION

Power Supply : DC 24V;
Power Consumption: Standby 16mA;
Working status 56mA;
Working Temperature: -15°C ~ +55°C;
Wiring: 2 wires, non-polarity;
Dimension: 88(H)×110(W)×20(D)mm;




FEATURES

DIP address setting;
Max.128 DIP addresses;
Inner call Intercom;
Two locks control;
4 ringtones choice;
Suitable for villa
& apartment system.



TERMINAL DESCRIPTION

Reliable proximity access;
Password unlock;
Keypad room-code calling;
New menu-structure design;
Synthesis language reminder;
Large capacity
(max.128 apartments via BDU);
Name list via TFT screen display;
Rainy cover for surface mounting;
Aluminum alloy panel design with keypad;
Camera's angle is adjustable;
3.5 inch color TFT display;
IP 44 protection rate;
Compatible with all DT two wire
system models.

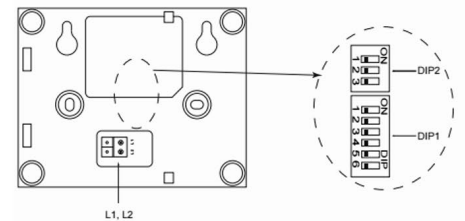


L1, L2: Bus terminal.

DIP1(Bit1~6): Used to User Code setting.

DIP2(Bit1~3): Used to Slave Monitor Address
or Extended Address setting.

Speaker	Send out voice from the visitor.
Microphone	Receive voice from the user.
Unlock button	Press to release the door.
Talk button	Press to communicate hands free with visitor
Unlock 2nd button/ Intercom button	During calling/talking state, press Unlock 2nd button to release the second door; In standby mode, press Call button to activate the intercom call.
Indicator	Power and working indicator.
Tone volume contronller	Adjust the tone volume.
Talk volume contronller	Adjust the talk volume.

PACKING INFORMATION

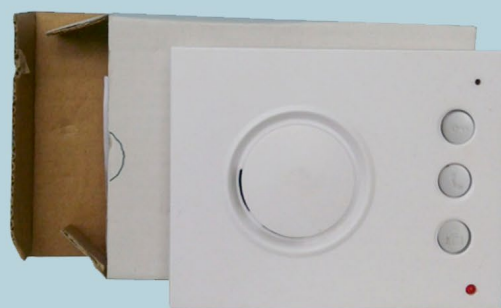

Dimensions:
128(H)×92(W)×30(D)mm
Gross Weight: 0.3Kg



Carton:
415 (H)×360 (W)×265 (D)mm
Quantity: 88PCS